



V814AWM

- Full 360° horizontal and ±75° vertical movement
- Attractive style and finish
- Versatile camera mounting

The V814AWM Adjustable Wall Mount is designed to support camera/housing combinations up to 20 pounds (9.0 kg). The adjustable head allows for full 360-degree rotation and varying tilt angles.

The V814AWM is a light-duty adjustable wall mount constructed of painted cast aluminum. It is suitable for indoor or outdoor installations. The mounting flange is attached to the wall using three No. 8 screws. The camera is attached to the mount using the three available holes on the adjustable head.

Notes: SUPERSEDES PRODUCT SPECIFICATION 938-698

Technical Information

MECHANICAL

Application: Indoor or outdoor.

Flange Mounting: Three No. 8 screws into wall or vertical structure.

Camera Mounting: Hole pattern on the adjustable head.

Type: Adjustable.

Angular Movement: Vertical: ±75°.
Horizontal: 360°.

Load Rating: 20 lb (9.0 kg).

Dimensions: Height (H): 5.4 in. (136 mm).
Width (W): 2.9 in. (74 mm).
Depth (D): 11.6 in. (295 mm).

Weight: 1.5 lb (0.7 kg).

Construction: Cast aluminum.

Finish: Primed and painted light beige.

Shipping Dimensions: Height: 4.3 in. (110 mm).
Width: 3.4 in. (86 mm).
Depth: 11.8 in. (300 mm).

Shipping Weight: 1.7 lb (0.8 kg).

Shipping Volume: 0.1 ft³ (0.003 m³).


ENVIRONMENTAL

Storage

Temperature Range: -40 to 150° F (-40 to 60° C).

Storage

Humidity Range: 0 to 90% relative, noncondensing.

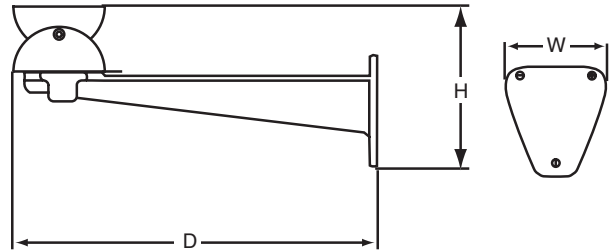

**TECHNICAL SPECIFICATIONS
DIVISION 13 - SPECIAL CONSTRUCTION
SECTION 137__ - SECURITY CCTV SYSTEM**

SECURITY SYSTEM

PART 2 - PRODUCTS

2.01 GENERAL

- A. All equipment and materials used shall be standard components, regularly manufactured, regularly utilized in the manufacturer's system.
- B. All systems and components shall have been thoroughly tested and proven in actual use.
- C. All systems and components shall be provided with the availability of a toll free 24-hour technical support phone number from the manufacturer. The phone number shall allow for immediate technical assistance for either the dealer/installer or the end user at no charge.
- D. All systems and components shall be provided with an explicit manufacturer warranty.

2.02 ADJUSTABLE WALL MOUNT

- A. The wall mount shall be a light-duty adjustable indoor/outdoor unit.
- B. The wall mount shall have the following mechanical specifications:
 - 1. **Application:** Indoor or outdoor
 - 2. **Mounting:** Flange: Three No. 8 screws into wall or vertical structure.
Camera: Hole pattern on the adjustable head.
 - 3. **Angular Movement:** The head shall be manually adjustable over a pan range of 360° and a tilt range of $\pm 75^\circ$.
 - 4. **Load Rating:** 20 lb (9.0 kg).
 - 5. **Dimensions:** Height: 5.4-in. (136 mm).
Width: 2.9-in. (74 mm).
Depth: 11.6-in. (295 mm).
 - 6. **Weight:** 1.5-lb. (0.7 kg).
 - 7. **Construction:** Cast aluminum.
 - 8. **Finish:** Primed and painted light beige.

The wall mount shall be Vicon Industries model V814AWM.